

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number
WO 2004/041522 A1

(51) International Patent Classification⁷: **B29D 30/60**,
30/20

(21) International Application Number:
PCT/IT2003/000669

(22) International Filing Date: 30 October 2003 (30.10.2003)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
PCT/IT02/00698 5 November 2002 (05.11.2002) IT

(71) Applicant (for all designated States except US): **PIRELLI PNEUMATICI S.P.A.** [IT/IT]; Viale Sarca, 222, I-20126 Milano (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LACAGNINA, Claudio** [IT/IT]; Via Dell'acqua, 18/2, I-21052 Busto Arsizio (IT).

(74) Agent: **TANSINI, Elio, Fabrizio**; c/o Bugnion S.p.A., Viale Lancetti, 17, I-20158 Milano (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A METHOD AND AN APPARATUS FOR ASSEMBLING TYRES FOR VEHICLE WHEELS

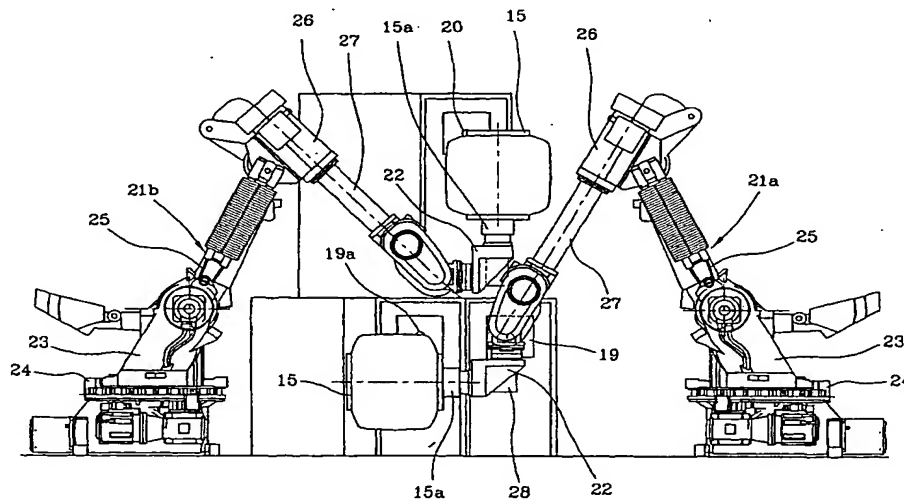

(57) **Abstract:** A carcass structure (3) of a tyre (2), previously formed on a building drum (14) is mounted on a primary drum (15), while a belt structure (4) is being made on an auxiliary drum (16). The primary drum (15) is supported by a robotized arm (21a, 21b) causing translation of said drum starting from a position at which it interacts with a member for transfer of the belt structure (4) onto the carcass structure (3), in order to sequentially submit it to the action of extruders (19, 19a, 20) each of which delivers a continuous strip-like element of elastomer material. Movement imparted to the primary drum (15) by the robotized arm (21a, 21b) in front of each extruder (19, 19a, 20) causes distribution of the strip-like element in circumferential coils disposed in side by side relationship, to form a layer of the desired thickness and geometric conformation for obtaining the sidewalls (6) and/or the tread band (5) of the tyre being processed.